

Aircraft Noise Measurement Report

Pinewick Rd.

Ellicott City, MD 21042

Prepared by Harris Miller Miller & Hanson, Inc.

April 2018

1. INTRODUCTION

This memorandum presents the measured aircraft noise levels for the period of February 28 to March 14, 2018 at Pinewick Rd. Ellicott City, MD 21042. This residence is located approximately 11.8 miles northwest of the western end of Runway 10/28 of Baltimore/Washington International Thurgood Marshall (BWI Marshall) Airport. Figure 1 shows the location of the measurement site (marked as BW269) relative to BWI Marshall. Measurement data were collected and analyzed on behalf of the Maryland Department of Transportation Maryland Aviation Administration (MAA) by Harris Miller Miller & Hanson (HMMH) and Straughan Environmental (SE). The equipment was regularly checked for function and calibrated during the measurements. With the exception of brief periods during calibration, noise levels were monitored continuously throughout the measurement period.

At the conclusion of the measurement period, data were uploaded to the MDOT MAA's Noise and Operations Monitoring System (NOMS). The NOMS compared the times of noise events to its database of aircraft radar flight paths. For the analyses presented in this report, a noise event occurs when the sound level exceeds a baseline threshold for five seconds. The baseline threshold is set at the start of the measurement period to be approximately ten decibels above the background sound levels. Noise events which occurred while aircraft were passing within the vicinity were identified as aircraft noise. This matching of noise events to individual aircraft flights makes possible the calculation of the total aircraft noise exposure over a particular hour or day as well as the full measurement period. Additionally, the relative contribution of different aircraft types (e.g. jet aircraft, propeller aircraft, helicopters) or operations (e.g. arrivals, departures) to the total noise exposure can be computed.

Section 2 of this memorandum describes the measurement location. Section 3 presents information about the aircraft operations during the measurement period. Section 4 summarizes the measured noise levels. Section 5 provides conclusions. The appendix titled "How Do We Describe Aircraft Noise" provides background information on acoustical terms used in this memorandum.

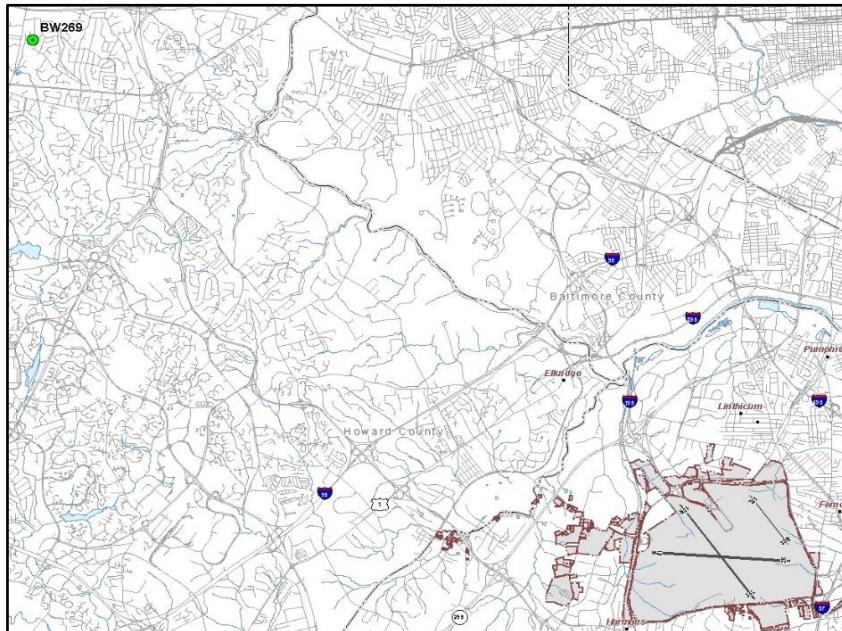


Figure 1. Noise Monitoring Location Map

2. MEASUREMENT SITE

Aircraft noise levels were measured from early afternoon on February 28 through early afternoon on March 14, 2018 at Pinewick Rd. in Ellicott City. The noise monitor was placed in the backyard of the residence. Figure 2 shows the placement of the noise monitoring equipment.

The noise monitor is a Type I sound level meter and is regularly calibrated. Additionally, the system was calibrated every two to four days during the measurements during equipment checks. The equipment experienced no malfunctions and the meter was only stopped briefly for the periodic calibration checks.

During setup, a baseline threshold was established for the sound level meter. Once the sound level exceeded the baseline threshold for five seconds, a noise event was recorded. The sound level meter recorded the following information about each noise event: date, time, duration, and noise levels. Notable noise sources at this site include aircraft overflights, primarily arrivals to BWI Marshall, as well as typical suburban sounds including neighborhood animals and traffic noise, which all may trigger a noise event.

Once the temporary noise monitoring period was complete, the noise event data was uploaded into MDOT MAA's NOMS to compare the times of noise events to its database of aircraft radar flight paths. The NOMS conservatively attributes any noise event that occurs when an aircraft is within 10,000 ft. of a measurement site to that aircraft. Noise events which occurred while aircraft were passing within the vicinity were associated with an actual aircraft flight and therefore assigned as aircraft noise events. Using this methodology, noise events that are correlated with aircraft overflights may include other community noise, which may or may not exceed the noise level from the aircraft overflight.

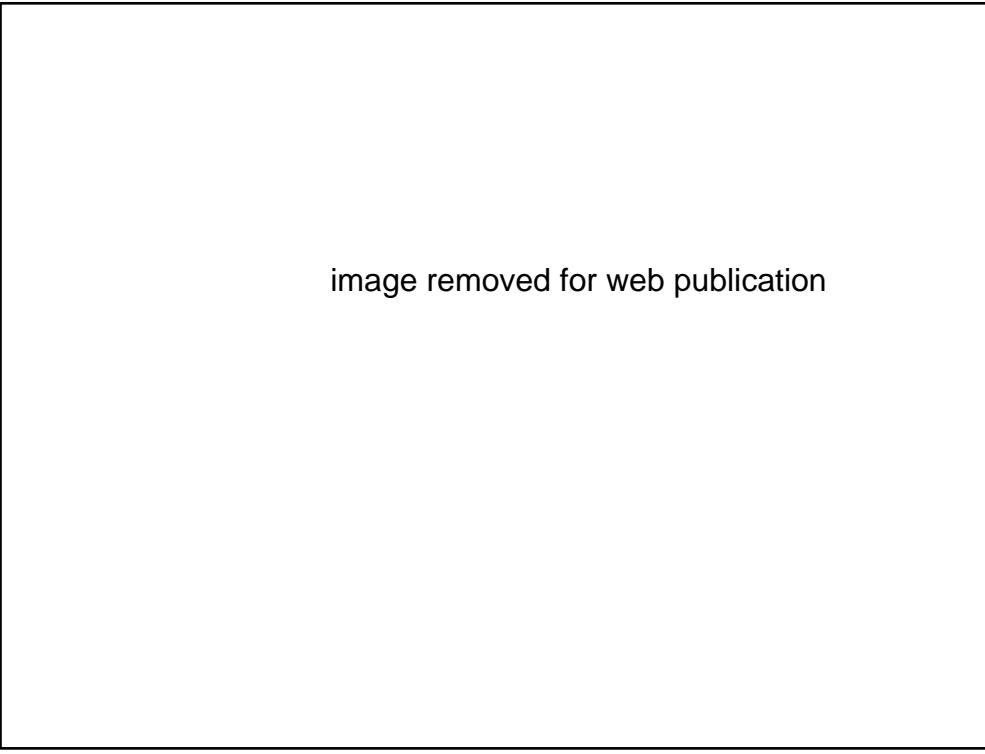


image removed for web publication

Figure 2. Noise Measurement Microphone

3. AIRCRAFT OPERATIONS

The measurement site is located to the northwest of BWI Marshall and the primary aircraft noise events for this site are due to arrivals on BWI Marshall Runway 10. Other less common noise events are due to arrivals on BWI Marshall Runway 33R, departures on BWI Marshall Runway 33R, and other overflights not associated with BWI Marshall.

During the measurement period, BWI Marshall operated in two configurations:

- departures on Runway 28 and arrivals on Runway 33L (west flow) and
- departures on Runway 15R and arrivals on Runway 10 (east flow).

The most common configuration on an annual basis at BWI Marshall, departures on Runway 28 and arrivals on Runway 33L, was active for ten days during the measurement period. On five days, BWI Marshall operated in combinations of the two configurations above during different portions of the day. BWI Marshall did not operate in east flow configuration, departures on Runway 15R and arrivals on Runway 10, for an entire day during the measurement period. Table 2 in the Measured Noise Levels section includes a description of the primary arrival and departure runways for each day.

Figure 3 displays all BWI Marshall flight tracks for a typical day during the measurement period in west flow, which primarily utilizes Runway 28 for departures and Runway 33L for arrivals. The red flight tracks are arrivals and the blue flight tracks are departures. The location of the measurement site is marked with its unique identifier in the NOMS, “BW269”. Figure 4 displays the same west flow flight tracks at a closer scale. Again, the text “BW269” shows the location of the measurement site. In west flow, the primary BWI Marshall overflights were arrivals and departures on Runway 33R. Arrivals on Runway 33R were at 2,300 or 4,900 ft. above ground level at their point of closest approach to the measurement site. Departures on Runway 33R were generally 1,700 to 6,300 ft. above ground level at their closest approach to the measurement site with the most common altitude being 5,300 ft.


Figure 5 displays all BWI Marshall flight tracks for a typical period of the day during the measurement period in east flow, which primarily utilizes Runway 15R for departures and Runway 10 for arrivals. Figure 6 displays the same flight tracks at a closer scale. In east flow, the primary BWI Marshall overflights were arrivals on Runway 10. These arrivals were generally 2,100 to 3,600 ft. above ground level at their point of closest approach to the measurement site, with the most common altitude being 3,300 ft.

Figure 7 displays all overflights not associated with BWI Marshall for a typical day during the measurement period. Figure 8 displays the same flight tracks at a closer scale. Overflights not associated with BWI Marshall were at various altitudes at their point of closest approach to the measurement site.


HMMH

Noise Measurement Report for Pinewick Rd., Ellicott City, MD 21042 April 2018

Page 5

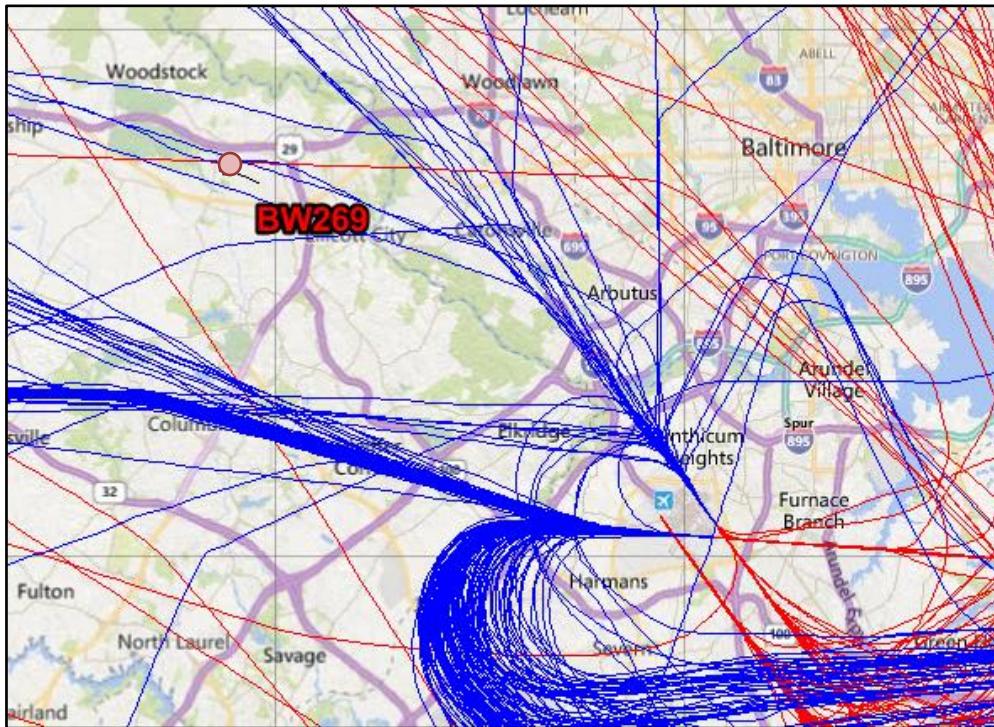

**Figure 3. All Flight Tracks for a West Flow Day – March 8, 2018
(red = arrivals, blue = departures)**

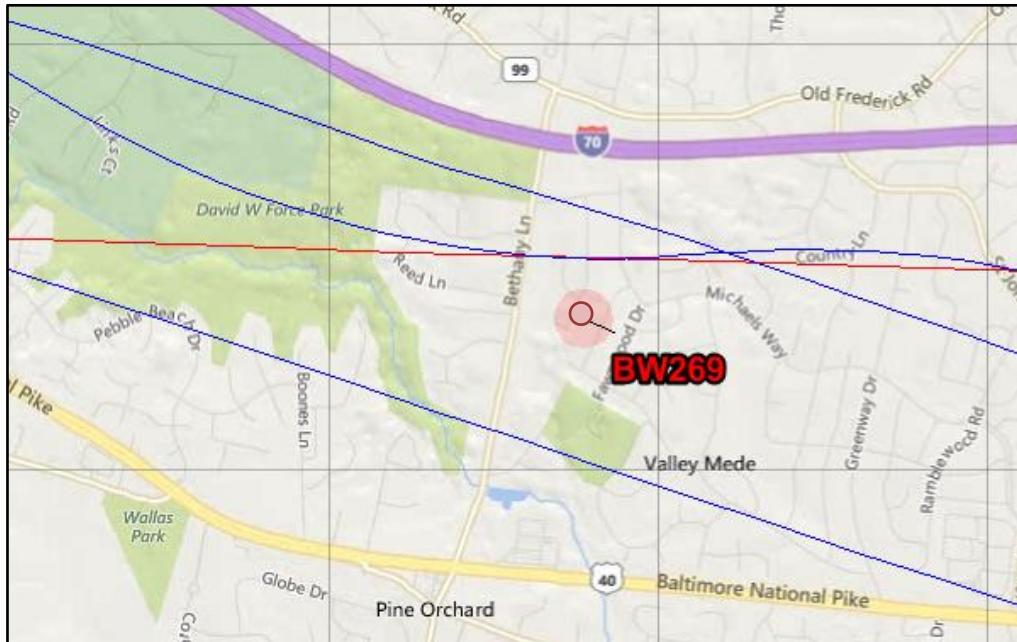


**Figure 4. All Flight Tracks for a West Flow Day – March 8, 2018
(red = arrivals, blue = departures)**


HMMH

Noise Measurement Report for Pinewick Rd., Ellicott City, MD 21042 April 2018

Page 6

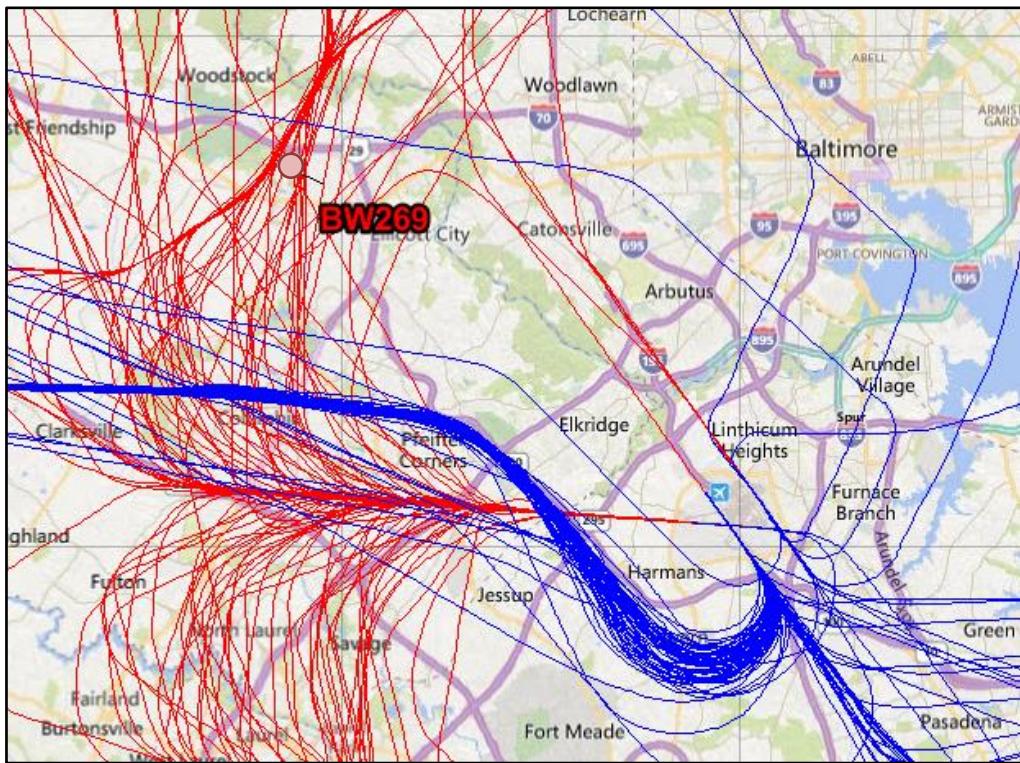

**Figure 5. All Flight Tracks for an East Flow Period – Afternoon of March 12, 2018
(red = arrivals, blue = departures)**

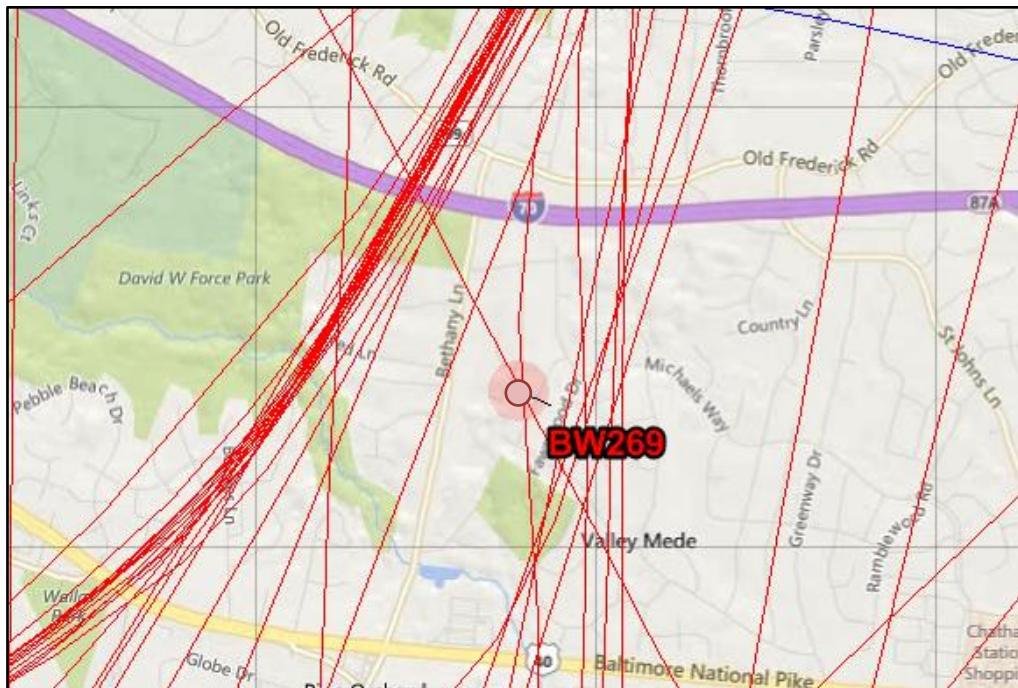

**Figure 6. All Flight Tracks for an East Flow Period – Afternoon of March 12, 2018
(red = arrivals, blue = departures)**

HMMH

Noise Measurement Report for Pinewick Rd., Ellicott City, MD 21042 April

2018

Page 7

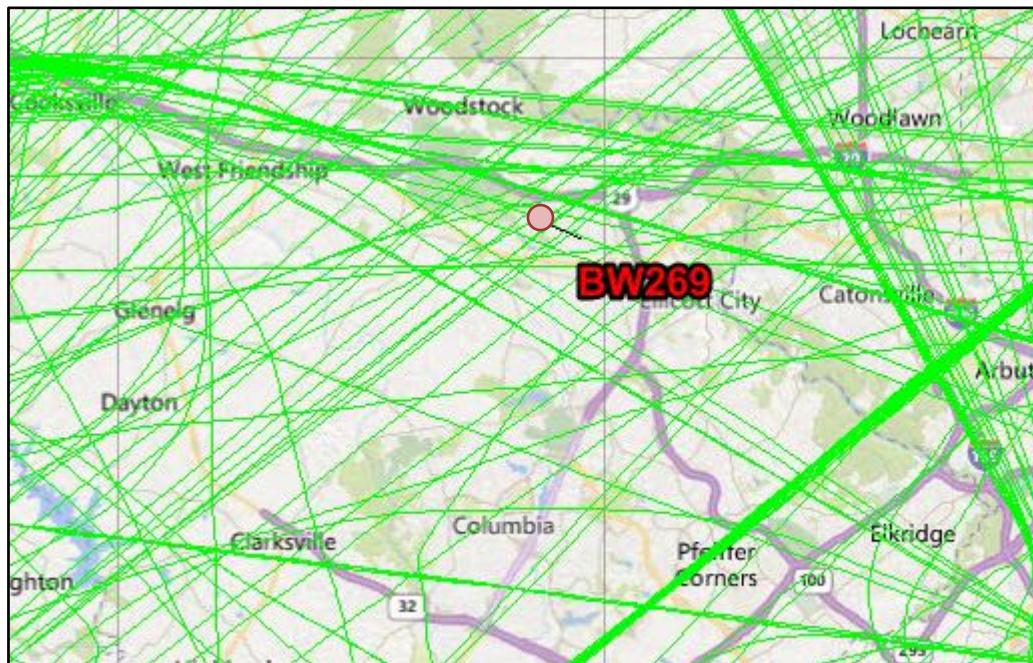


Figure 7. Other Overflights not associated with BWI Marshall – March 13, 2018
(green = overflights)

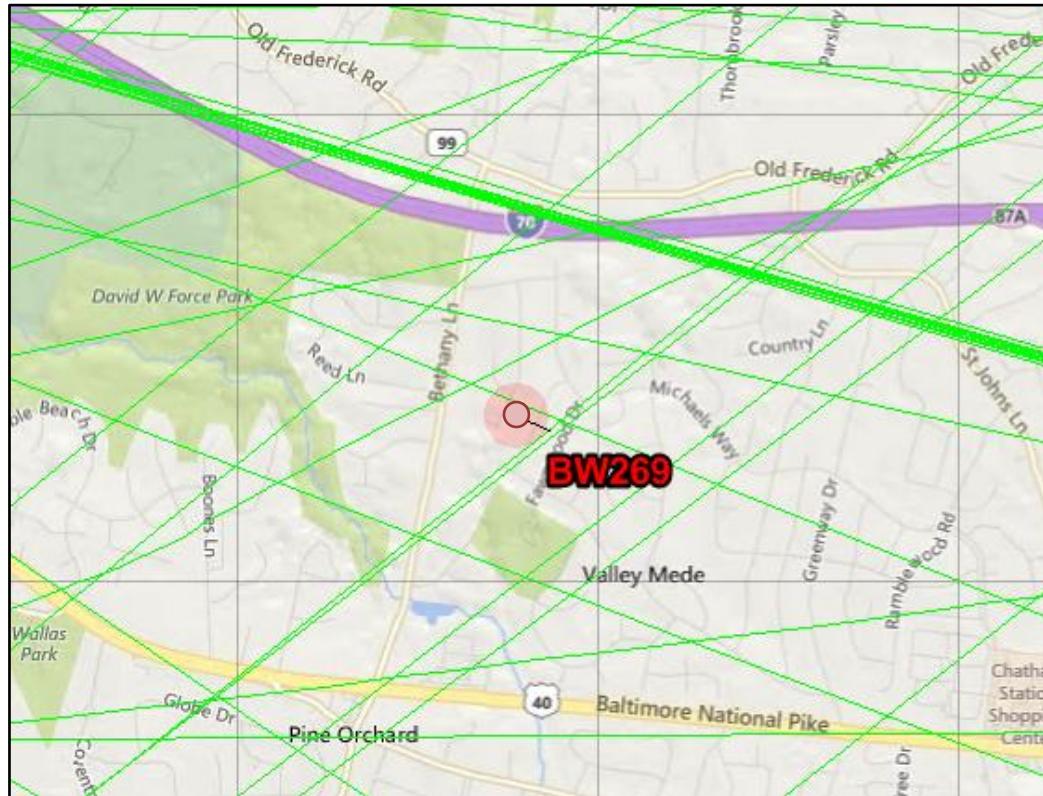


Figure 8. Other Overflights not associated with BWI Marshall – March 13, 2018
(green = overflights)

4. MEASURED NOISE LEVELS

This section provides an introduction to noise terminology, discusses the noise levels from individual aircraft noise events, and summarizes the cumulative noise exposure over the measurement period.

4.1 Aircraft Noise Terminology

There are several key metrics which are used to describe aircraft noise on a single-event and cumulative basis. The appendix titled “How Do We Describe Aircraft Noise” provides a more detailed overview of the metrics which are discussed in this section.

In brief, noise can be described by A-Weighted Sound Level¹ and is expressed in decibels (noted as dB or dBA). This noise level rises and falls from second to second as noise becomes louder or quieter. The average noise level over some time period, such as an hour, is called the Equivalent Sound Level (Leq). For a particular noise event, such as an aircraft overflight, the loudest level at any instant during the event is the Maximum A-Weighted Sound Level (Lmax). The Lmax tends to correlate poorly to people’s perception of the total “noisiness” of an event because it neglects the duration. The Sound Exposure Level (SEL) accounts for both the level and duration of the noise and is the best measure of the “noisiness” of a single event. Finally, the noise exposure over a complete day is represented by the Day-Night Average Sound Level (DNL). This metric sums all of the noise exposure over the day with a ten decibel weighting for any noise which occurs during the nighttime (10 pm to 7 am) to account for the intrusive nature of these noise events.

4.2 Single Event Noise Levels

Figure 9 presents a count of noise events due to arrivals on Runway 10 at various Lmax values for the complete measurement period. For example, the tallest red bar in the figure shows that 19 arrivals on Runway 10 had an Lmax of 61 dB. For typical conversational speech at a distance of approximately three feet, speech is interrupted by noise levels at or above 65 dB. Any noise events shown in this figure with a maximum level at or above 65 dB would, briefly for quieter events and longer for louder events, interrupt typical conversations outdoors. Figure 10 shows counts of noise events at various Lmax values due to arrivals on Runway 33R, departures on Runway 33R, and other overflights not associated with BWI Marshall. Note that there were fewer noise events due to these aircraft operations as compared to arrivals on Runway 10 and therefore the vertical scale of this figure is different from the scale in Figure 9.

Figure 11 and Figure 12 tell a similar story using the SEL metric which corresponds better to people’s judgment of the noisiness of an event. Arrivals on Runway 10 produced the largest number of noise events. Noise events due to arrivals on Runway 33R, departures on Runway 33R, and other overflights not associated with BWI Marshall were less common than noise events due to arrivals on Runway 10.

Note that the noise events measured and presented in this report are those which can be clearly detected by the noise measurement equipment. Aircraft noise events with maximum levels at, near, or below the ambient noise levels from community noise sources are difficult, and sometimes impossible, to quantify and in most cases contribute little to the total noise exposure.

¹ A-Weighting simply refers to a method of computing the noise level which accounts for the particular response of the human ear. It is the standard for the vast majority of environmental noise analyses.

HMMH

Noise Measurement Report for Pinewick Rd., Ellicott City, MD 21042 April
2018

Page 9

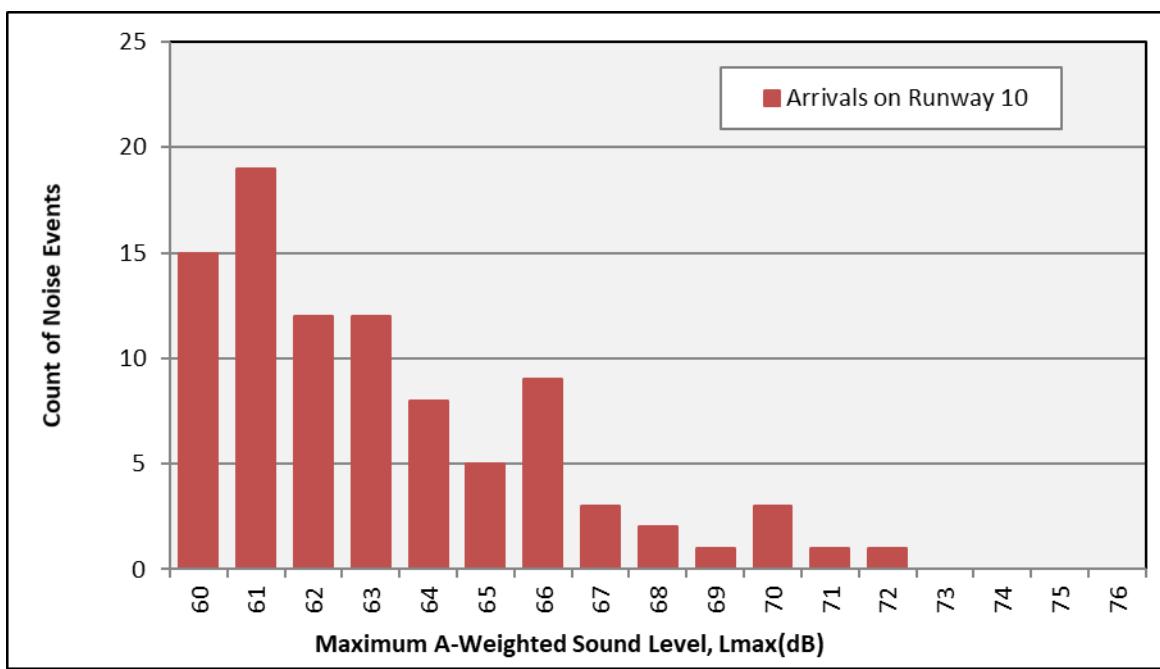


Figure 9. Counts of Maximum Noise Levels from Aircraft Overflights over the Full Measurement Period – Arrivals on Runway 10

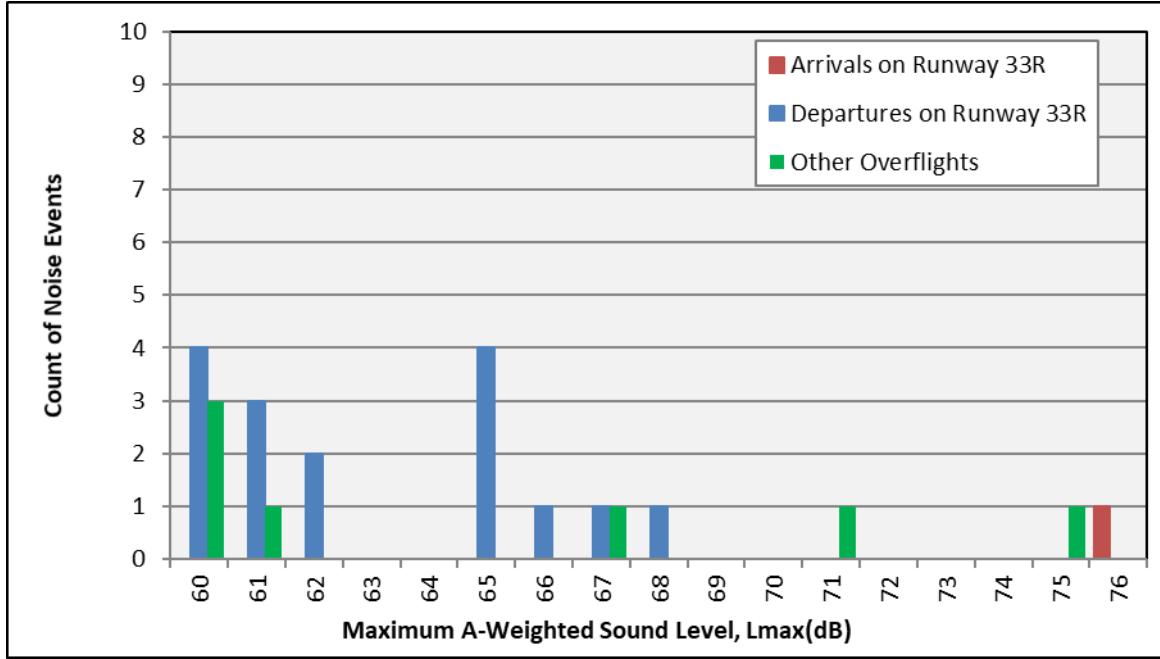


Figure 10. Counts of Maximum Noise Levels from Aircraft Overflights over the Full Measurement Period – Arrivals on Runway 33R, Departures on Runway 33R, and Other Overflights not associated with BWI Marshall

HMMH

Noise Measurement Report for Pinewick Rd., Ellicott City, MD 21042 April
2018

Page 10

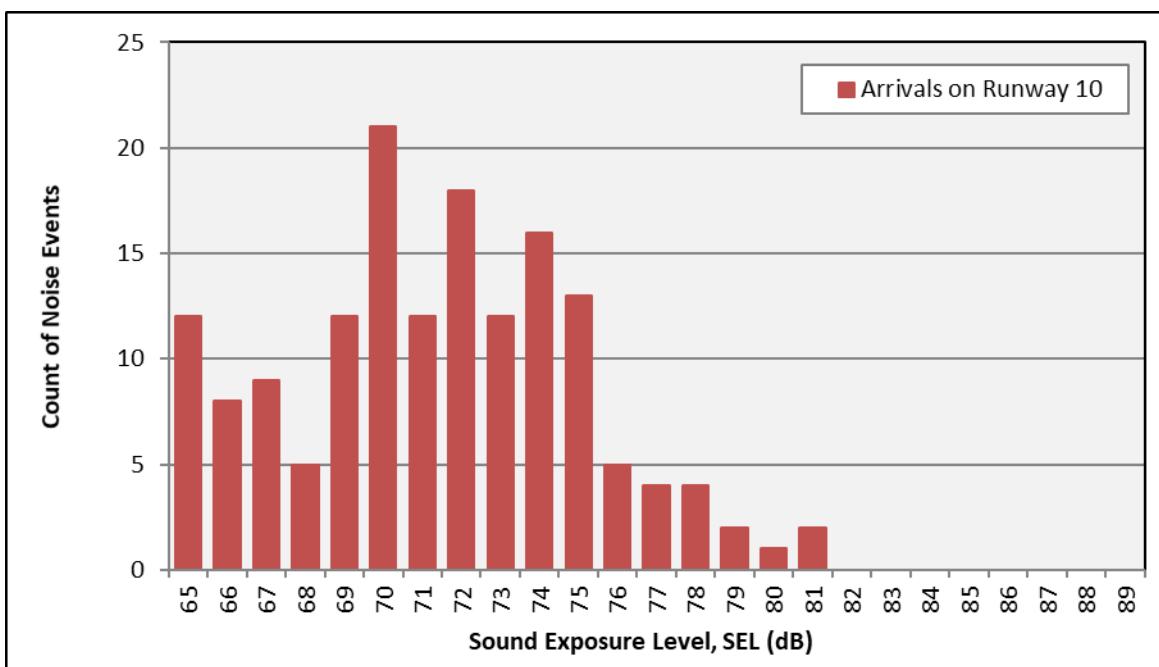


Figure 11. Counts of Sound Exposure Levels from Aircraft Overflights over the Full Measurement Period – Arrivals on Runway 10

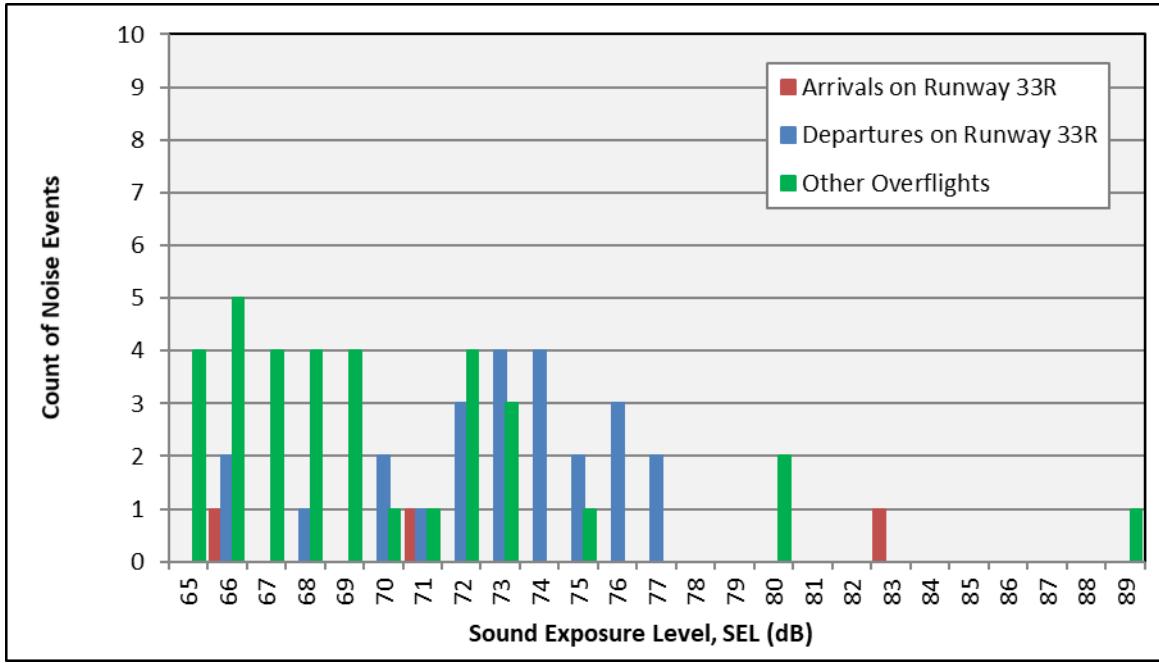


Figure 12. Counts of Sound Exposure Levels from Aircraft Overflights over the Full Measurement Period – Arrivals on Runway 33R, Departures on Runway 33R, and Other Overflights not associated with BWI Marshall

Arrivals on Runway 10 were the most common aircraft operation associated with noise events during the measurement period. The table below shows the distribution of Lmax values for arrivals on Runway 10 for all aircraft types over the full measurement period.

Table 1. Noise Events Associated with Runway 10 Arrivals				
Maximum A-Weighted Sound Level, Lmax (dB)	Total Number of Noise Events	Average Daily Number of Noise Events	Percent	
55-59	36	2.6	41%	
60-64	44	3.1	50%	
65-69	6	0.4	7%	
70-74	2	0.1	2%	
75-79	-	0.0	0%	
80-84	-	0.0	0%	
85+	-	0.0	0%	
Total	88	6.3	100%	

As discussed above in Section 2 , the noise events that are correlated with aircraft overflights may also include other community noise (e.g., neighborhood animals, traffic, etc.) within the measurement. Such community noise may or may or may not exceed the noise level from the correlated aircraft overflight, but may contribute to higher single event noise levels.

4.3 Cumulative Noise Levels

Figure 13 provides a way to visualize the changes in aircraft noise levels over the measurement period. The average aircraft noise level (Leq) is presented on an hourly basis. Hours with louder or more aircraft events will show higher Leq values. Regions where the bars are absent simply indicate periods where no aircraft noise events occurred. Note that the cumulative noise level for each day incorporates these hourly noise levels with an additional ten decibel weighting for nighttime noise levels. This cumulative daily noise level, called DNL, is discussed next.

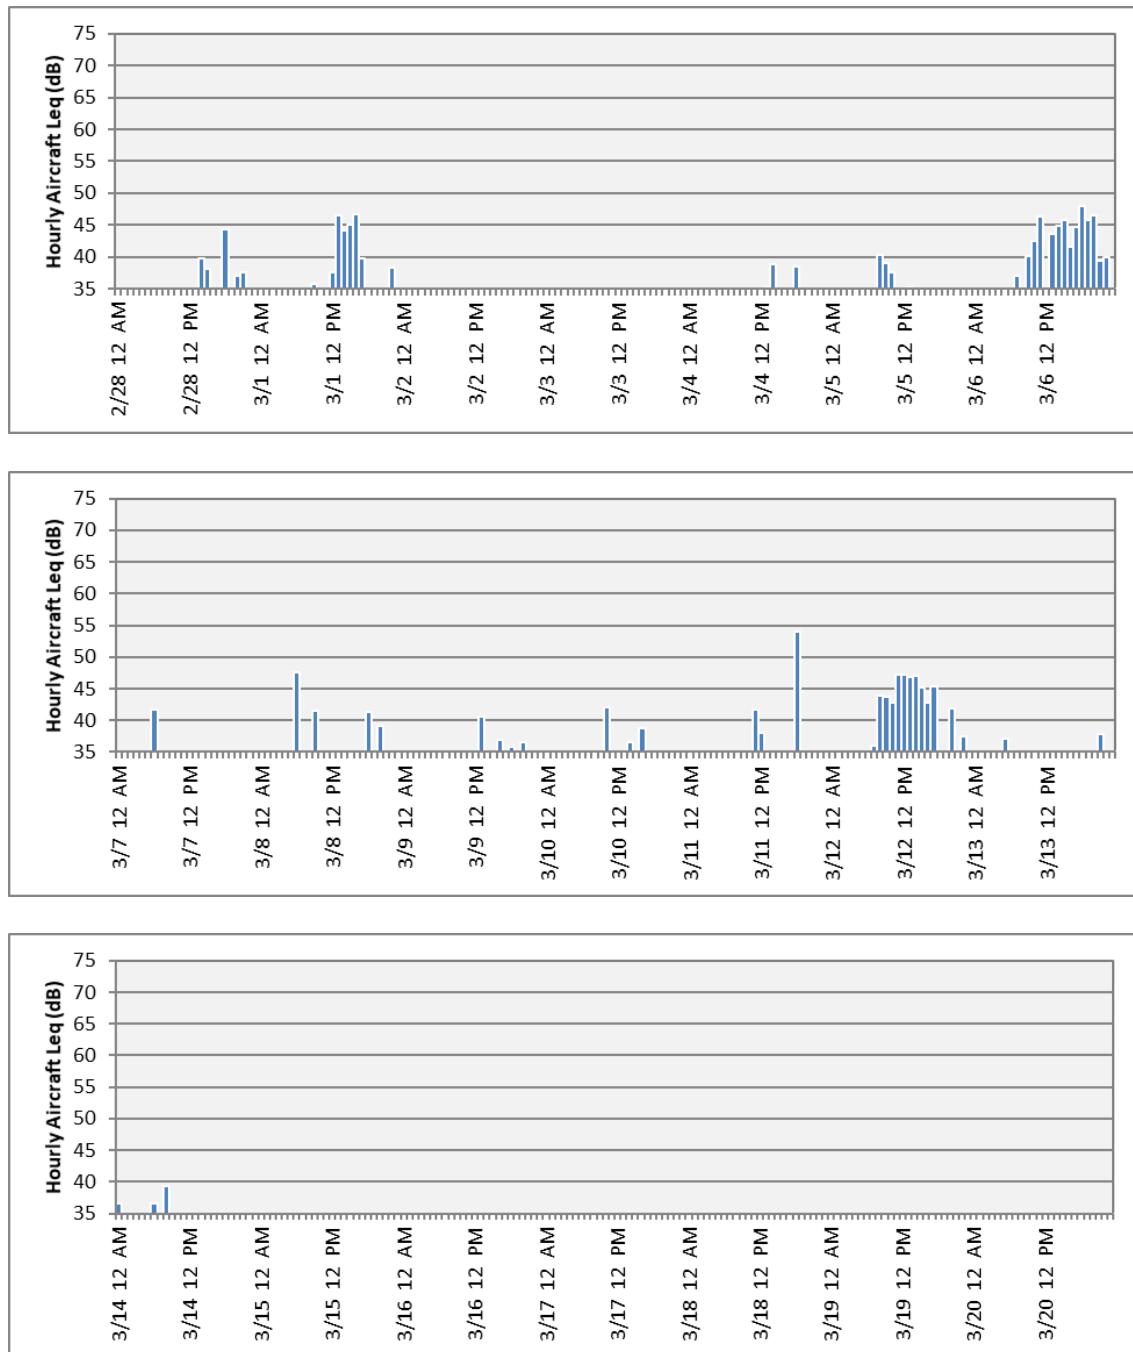


Figure 13. Average Hourly Aircraft Noise Levels

Table 2 summarizes the cumulative noise exposure over each of the fifteen days of recorded data within the measurement period using the DNL metric. DNL sums the noise from every aircraft noise event over the day. The formula for DNL gives an extra ten decibel weighting to nighttime noise events to account for the intrusive nature of these events. The DNL for the thirteen complete days, as shown in Table 2, ranged from 30 dB to 44 dB. Note that no DNL value is presented for March 2 and March 3, 2018 due to a lack of aircraft noise events at the measurement site on those dates.

Table 2. Measured Daily Aircraft Noise Levels			
Date	Day-Night Average Sound Level, DNL (dB)	Hours Measured	Primary Aircraft Operations
2/28/2018	37*	10	15R Dep/10 Arr until 7 am, then 28 Dep/33L Arr
3/1/2018	40	24	28 Dep/33L Arr until 12 pm, then 15R Dep/10 Arr
3/2/2018	-	24	28 Dep/33L Arr
3/3/2018	-	24	28 Dep/33L Arr
3/4/2018	30	24	28 Dep/33L Arr
3/5/2018	34	24	28 Dep/33L Arr
3/6/2018	43	24	28 Dep/33L Arr until 9 am, then 15R Dep/10 Arr
3/7/2018	38	24	15R Dep/10 Arr until 7 am, then 28 Dep/33L Arr
3/8/2018	44	24	28 Dep/33L Arr
3/9/2018	31	24	28 Dep/33L Arr
3/10/2018	31	24	28 Dep/33L Arr
3/11/2018	41	23	28 Dep/33L Arr
3/12/2018	43	24	28 Dep/33L Arr until 7 am, then 15R Dep/10 Arr until 6 pm, then 28 Dep/33L Arr
3/13/2018	34	24	28 Dep/33L Arr
3/14/2018	39*	15	28 Dep/33L Arr
Total	39	336	-

Notes:

* Measurements for a partial day may not represent the average noise level for the complete day.

As shown in the single event figures, Figure 9 through Figure 12, most of the noise events at this site are from arrivals on Runway 10. Other less common noise events are due to arrivals on Runway 33R, departures on Runway 33R, and other overflights not associated with BWI Marshall. Arrivals on Runway 10 accounted for about forty-six percent of the DNL. Arrivals on Runway 33R accounted for about twenty-two percent of the DNL. Departures on Runway 33R accounted for about seven percent of the DNL. Other overflights not associated with BWI Marshall accounted for about seventeen percent of the DNL. The remainder of the DNL during the measurement period was due to arrivals and departures on other BWI Marshall runways.

5. CONCLUSION

The composite aircraft DNL over the full measurement period was 39 dB. The precise DNL over a full year will depend on the type and number of aircraft utilizing BWI Marshall and the percentage of time the airport spends in various operational configurations. Approximately eighty-five percent of operations during the measurement period were in west flow and fifteen percent were in east flow, which is more than the typical annual average of seventy percent west flow operations. Noise levels at this site are higher in east flow. Based only on the measurements and a seventy percent annual west flow assumption, the annual DNL at the measurement site is likely somewhat higher than the 39 dB that was measured for this period. Note however, that all things are generally not equal when comparing a small time period to a full year of data. Aircraft profiles and flight paths can vary due to weather and the types of aircraft and times of flights can change due to shifts in airline flight schedules.

In Appendix A of 14 CFR Part 150, the Federal Aviation Administration provides guidelines for the compatibility of land uses with various annual DNL values. These guidelines consider residential land use to be incompatible when the DNL is 75 dB or greater. For noise levels between 65 dB and 75 dB DNL, residential land use is considered incompatible, but where the community determines that this land use must be allowed, measures to achieve greater than typical outdoor to indoor noise level reduction should be incorporated into building codes. The guidelines designate all land uses, including residential, as compatible for DNL values below 65 dB.

How do we Describe Aircraft Noise?

We use a number of terms to describe aircraft noise. These metrics form the basis for the majority of noise analyses conducted at most airports in the U.S.

The Decibel, dB

All sounds come from a source – a musical instrument, a voice speaking, an airplane. The energy that produces these sounds is transmitted through the air in waves, or sound pressures, which impinge on the ear, creating the sound we hear.

The decibel is a ratio that compares the sound pressure of the sound source of interest (e.g., the aircraft over flight) to a reference pressure (the quietest sound we can hear). Because the range of sound pressures is very large, we use logarithms to simplify the expression to a smaller range, and express the resulting value in decibels (dB). Two useful rules of thumb to remember when comparing individual noise sources are: (1) most of us perceive a six to ten dB increase to be about a doubling of loudness, and (2) changes of less than about three dB are not easily detected outside of a laboratory.

The A-Weighted Decibel, dB(A)

Frequency, or “pitch”, is an important characteristic of sound. When analyzing noise, we are interested in how much is low-, middle-, and high-frequency noise. This breakdown is important for two reasons. First, our ears are better equipped to hear mid- and high-frequencies; thus, we find mid- and high-frequency noise more annoying. Second, engineering solutions to noise problems are different for different frequency ranges. The “A” filter approximates the sensitivity of our ear and helps us to assess the relative loudness of various sounds.

Maximum A-weighted Sound Level, L_{max}

A-weighted sound levels vary with time. For example, the sound increases as an aircraft approaches, then falls and blends into the background as the aircraft recedes into the distance. Figure 1 illustrates this phenomenon. We often describe a particular noise “event” by its maximum sound level (L_{max}). Figure 2 shows typical L_{max} values for some common noise sources. In fact, two events with identical L_{max} may produce very different total exposures. One may be of very short duration, while the other may be much longer.

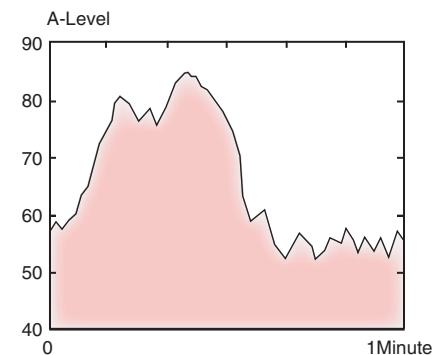


Figure 1. A-weighted Sound Levels Over Time

Sound Exposure Level, SEL

The most common measure of cumulative noise exposure for a single aircraft flyover is the Sound Exposure Level (SEL). Mathematically, it is the sum of the sound energy over the duration of a noise event – one can think of it as an equivalent noise event with a one-second duration. Figure 3 shows that portion of the sound energy included in this event. Because the SEL is normalized to one second, it will almost always be larger in magnitude than the L_{max} for the event. In fact, for most aircraft events, the SEL is about 7 to 12 dB higher than the L_{max}. Also, the fact that it is cumulative measure means that a higher SEL can result from either a louder or longer event, or some combination.

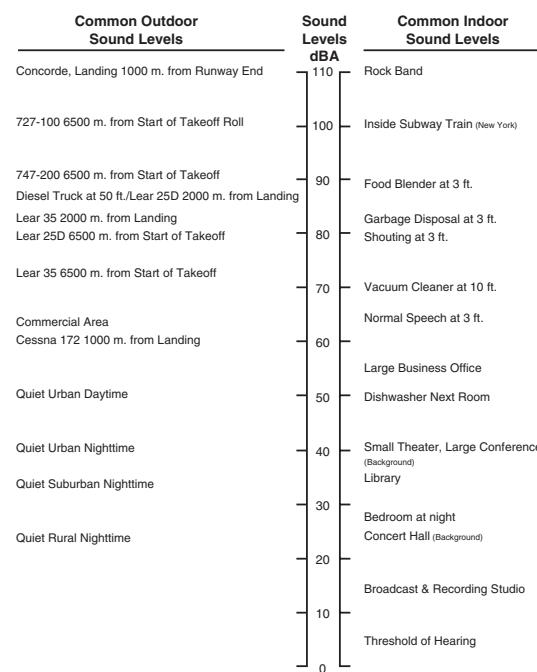


Figure 2. Common Environmental Sound Levels

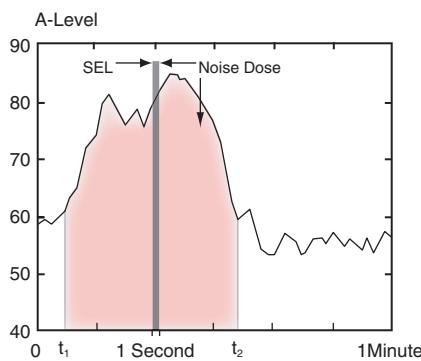


Figure 3. Sound Exposure Level

SEL provides a comprehensive way to describe noise events for use in modeling and comparing noise environments. Computer noise models base their computations on SEL values.

Day-Night Average Sound Level, DNL

The Day-Night Average Sound Level (DNL) represents noise as it occurs over a 24-hour period, with the assumption noise events occurring at night (10 p.m. to 7 a.m.) are 10 dB louder than they really are. This 10 dB penalty is applied to account for greater sensitivity to nighttime noise, and the fact that events at night are often perceived to be more intrusive because nighttime ambient noise is less than daytime ambient noise.

Figure 4 depicts a hypothetical daily noise dose. The top frame repeats the one-minute noise exposure that was shown in Figure 1. The center frame includes this one-minute interval within a full hour; now the shaded area represents the noise during that hour with 16 noise events, each producing an SEL. Finally, the bottom frame includes the one-hour interval within a full 24 hours. Here the shaded area represents the listener's noise dose over a full day.

DNL normally can be measured with standard monitoring equipment or predicted with computer models.

Most aircraft noise studies utilize computer-generated estimates of DNL, determined by accounting for all of the SELs from individual events which comprise the total noise dose at a given location on the ground.

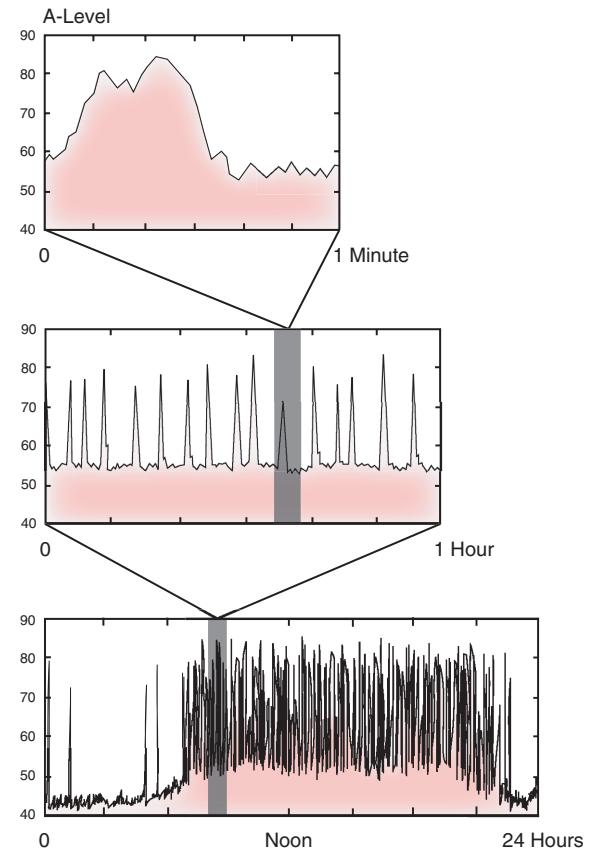


Figure 4. Daily Noise Dose

Computed values of DNL are often depicted as noise contours reflecting lines of equal exposure around an airport (much as topographic maps indicate contours of equal elevation). DNL contours usually reflect annual average operating conditions, taking into account the average number of flights each day, how often each runway is used throughout the year, and where over the surrounding communities the aircraft normally fly.



HARRIS MILLER MILLER & HANSON INC.

Consultants in Noise and Vibration Control

www.hmmh.com